


# **Safety vehicle, has crash sensor or sensors formed by sensor element designed to activate occupant restraint system and/or vehicle dynamic system**

**Patent number:** DE10108879  
**Publication date:** 2002-09-05  
**Inventor:** WITTE BASTIAN (DE); BABBEL ECKHARD (DE); SPICHALSKY CARSTEN (DE)  
**Applicant:** VOLKSWAGENWERK AG (DE)  
**Classification:**  
- international: **B60R21/01; B60T7/12; B60T8/32; B62D37/00; B62D39/00; B60R21/01; B60T7/12; B60T8/32; B62D37/00; B62D39/00; (IPC1-7): B60R21/01; B60R21/32; B60T7/12; B62D37/00**  
- european: **B60R21/01C; B60T7/12; B60T8/32; B62D37/00; B62D39/00**  
**Application number:** DE20011008879 20010223  
**Priority number(s):** DE20011008879 20010223

[Report a data error here](#)

## **Abstract of DE10108879**

The vehicle (1) has at least one controller (2) by which at least one vehicle braking device (8-11) can be activated depending on a signal from at least one crash sensor. The crash sensor or sensors is formed by a sensor element (3;4-7,16) designed to activate an occupant restraint system, in the form of an airbag (14) and/or a safety belt system (15), and/or a vehicle dynamic system (17-21).

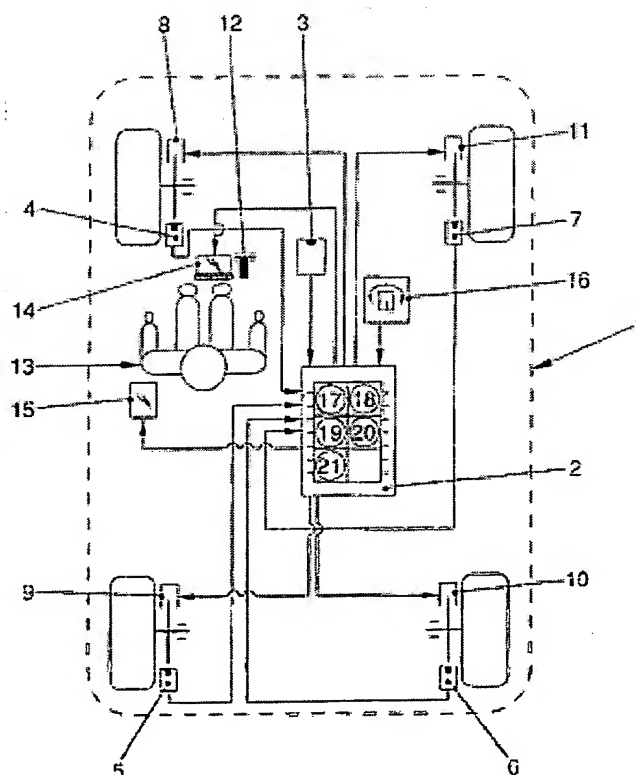

Data supplied from the **esp@cenet** database - Worldwide

